


# CILINDROS DOBLE EFECTO

Pmax=200 Kg/cm<sup>2</sup>

"STOCK PERMANENTE"

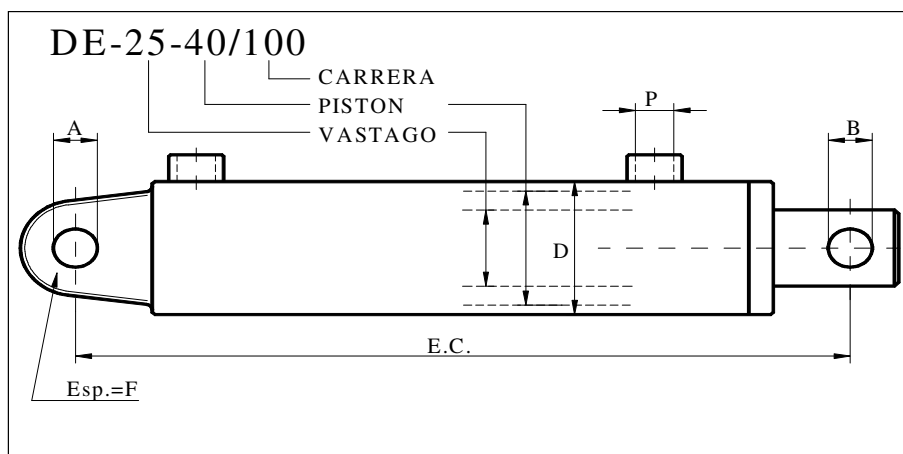

CILINDRO	E.C.	A	B	D	F	P	
DE-25-40/100	267	15	15	50	20	3/8"G	
DE-25-40/150	317	15	15	50	20	3/8"G	
DE-25-40/200	367	15	15	50	20	3/8"G	
DE-25-40/250	417	15	15	50	20	3/8"G	
DE-25-40/300	467	15	15	50	20	3/8"G	
DE-25-40/400	567	15	15	50	20	3/8"G	
DE-25-40/500	667	15	15	50	20	3/8"G	
DE-30-50/150	351	18	18	60	25	3/8"G	
DE-30-50/180	386	16	16	60	25	1/2"G	
DE-30-50/250	451	18	18	60	25	3/8"G	
DE-30-50/300	501	18	18	60	25	3/8"G	
DE-30-50/350	551	18	18	60	25	3/8"G	
DE-30-50/400	601	18	18	60	25	3/8"G	
DE-30-50/450	651	18	18	60	25	3/8"G	
DE-30-50/800	1001	18	18	60	25	3/8"G	
DE-30-50/1000	1201	18	18	60	25	3/8"G	
DE-40-60/200	411	22	22	70	30	3/8"G	
DE-40-60/300	511	22	22	70	30	3/8"G	
DE-40-60/400	611	22	22	70	30	3/8"G	
DE-40-60/500	711	22	22	70	30	3/8"G	
DE-40-60/600	811	22	22	70	30	3/8"G	
DE-40-60/1000	1211	22	22	70	30	3/8"G	
DE-40-70/350	577	22	22	85	30	1/2"G	
DE-40-70/500	727	22	22	85	30	1/2"G	
DE-45-70/350	582	25	25	85	30	1/2"G	
DE-45-70/400	615	23	23	85	30	3/8"G	
DE-45-70/450	682	25	25	85	30	1/2"G	
DE-45-70/500	715	23	23	85	30	3/8"G	
DE-45-70/550	782	25	25	85	30	1/2"G	
DE-50-80/300	547	28	28	95	40	1/2"G	
DE-50-80/600	842	28	28	95	40	1/2"G	
DE-50-85/400	650	30	30	100	35	1/2"G	